

Distributed by:



www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

SPECIFICATION SHEET

DATE: NOV.19,99


NO.: HN99111902

PAGE: 1/2

TYPE: HN-GH30GM TYPE
MODEL: HN-GH12-1828Y
CUSTOMER PART NO.:

Jameco Part Number 170641

I. OUTER DIMENSIONS :

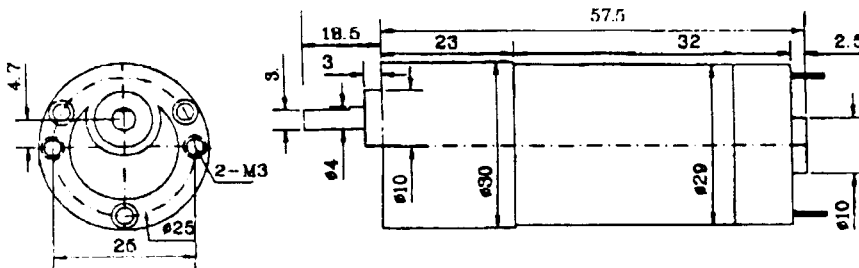

II. GEAR RATIO : 332:1

TYPE	A	B	C	D	E
RATIO	8	21	53	132	332
DIM "L" MM	23	23	23	23	23
EFF %	81	73	66	59	59
ALLOWABLE TORQUE kg-cm	0.6	1.0	2.5	5	6

SPECIFICATION SHEET

DATE: NOV.19,99

NO.: HN99111902

PAGE: 2/2

TYPE: HN-GH30GM TYPE
MODEL NO.: HN-GH12-1828Y
CUSTOMER PART NO.:

III. SPECIFICATIONS :

1. RATED VOLTAGE: DC 12V
2. DC VOLTAGE OPERATING RANGE: DC 6.0-24V
3. TORQUE (LOAD) AT MAXIMUM EFFICIENCY : 3.50 Kg-cm
4. NO LOAD SPEED: 9 RPM +/-10%
5. SPEED AT MAXIMUM EFFICIENCY (UNDER LOAD AT 3.50 Kg-cm): 8 RPM +/- 10%
6. NO LOAD CURRENT: MAX. 45 mA
7. CURRENT AT MAX. EFFICIENCY (UNDER LOAD AT 3.50 Kg-cm): MAX. 105 mA
8. SHAFT END PLAY: MAX. 0.8 m/m
9. INSULATION RESISTANCE: 10M OHM
10. DIELECTRIC STRENGTH: 300V DC
11. GEAR RATIO : 332:1